





## WALL / WINDOW AXIAL FANS



MODELS	PROTECTION	m <sup>3</sup> /h	l/s	dB(A)*	Pa	W
VITRO 6/150 Manual	IPX4**	200	56	40	37	24
VITRO 6/150 Automatic	IPX4**	200	56	40	37	28
VITRO 6/150 P Manual	IPX4**	300	83	48	75	41
VITRO 6/150 P Automatic	IPX4**	300	83	48	75	45
VITRO 9/230 Manual	IPX4**	700	194	50	56	43
VITRO 9/230 Automatic	IPX4**	700	194	50	56	46
VITRO 12/300 Automatic	IPX4**	1400	389	59	85	106

\* at 3 m - 230V/50Hz \*\*External part.

- Suitable for wall, double window and double glazed window installation. Accessories upon request.
- 9" and 12" (automatic) suitable for reverse running.

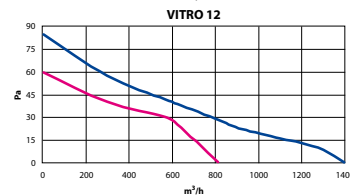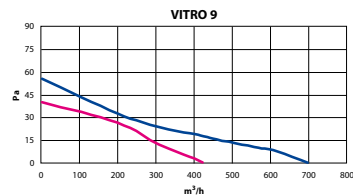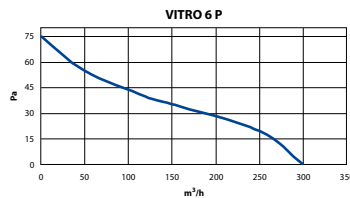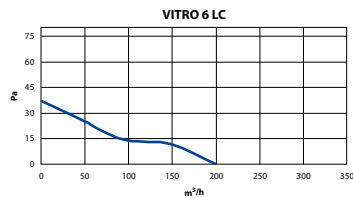

# VITRO



DIMENSIONS (mm)				
MODELS	A	B	C	ØD
VITRO 6/150 M	195	195	126	184/188
VITRO 6/150 A	195	195	126	184/188
VITRO 6/150 PM	195	195	126	184/188
VITRO 6/150 PA	195	195	126	184/188
VITRO 9/230 M	287	287	138	254/258
VITRO 9/230 A	287	287	138	254/258
VITRO 12/300 A	364	364	162	324/329

